


SolarEdge Nexis Battery

For Europe

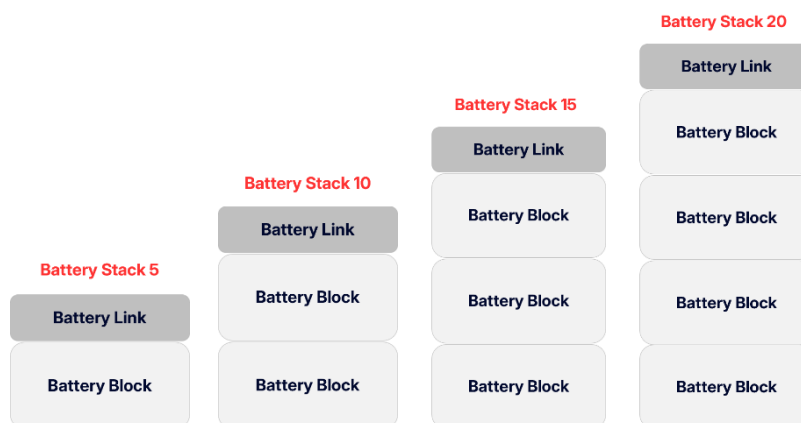

Number of Battery Blocks per Stack ⁽¹⁾		1	2	3	4	Units
ELECTRICAL SPECIFICATIONS						
Nominal Energy		4.9	9.8	14.7	19.6	kWh
Usable Energy		4.65	9.3	13.95	18.6	kWh
Charge / Discharge Power	370V – 480V (Single Phase)	3.5	7	10.5	13	kW
	715V – 950V (Three Phase)	3.5	7	10.5	14	kW
Operational DC Voltage Range		370 – 950				Vdc
Nominal DC Voltage (Single Phase / Three Phase)		450 / 750				Vdc
Maximum Input / Output Current	370V – 480V (Single Phase)	9.5	19	28.5	35	Aac
	715V – 950V (Three Phase)	5	10	15	20	Aac
DC Peak RTE		93				%
Battery Stack Interface		Each battery stack must include a battery link				
Battery Block Type		LiFePo4				
Communication Interface to Inverter		Wired CAN				
INVERTER COMPATIBILITY						
SolarEdge Nexis Inverter 1ph		Up to 4 battery blocks per battery stack				
SolarEdge Nexis Inverter 3ph		Up to 16 battery blocks per inverter (in up to 4 battery stacks) ⁽¹⁾⁽²⁾				
ADDITIONAL FEATURES						
Battery Optimizer		Each battery block includes an independent power module, maximizing backup operation and efficiency				
Simple-Click™		Mechanical self-locking connection and electric connection for an effortless and secure installation of: <ul style="list-style-type: none"> Battery block to battery block Battery block to battery link Battery link to inverter (only with SolarEdge Nexis Inverter 1ph) 				
ThermoShield™ Technology		Designed to prevent cell-to-cell thermal runaway propagation				
MECHANICAL SPECIFICATIONS						
Mounting		Floor or wall mount ⁽³⁾				
Installation Area		Indoor or outdoor, including in direct sunlight ⁽⁴⁾				
Ambient Operating Temperature Range		-20 to +55				°C
Storage Temperature Range (up to 12 months) ⁽⁵⁾		0 to +35				°C
Maximum Altitude		3000				m
Enclosure Protection		IP65				
Flood Resistance		37cm of water for up to 72 hours				
Cooling		Forced air and natural cooling				
Noise (at 1m distance)	Nominal Operation	< 40				dBa
	Extreme Conditions	< 50				dBa
Dimensions	Battery Link (W x D x H)	668 x 194 x 165				mm
	Battery Block (W x D x H)	668 x 194 x 374				mm
	Total Battery Height	539	913	1287	1661	mm
Weight	Battery Link	15				kg
	Battery Block	55				kg

(1) Each SolarEdge Nexis Battery is a combination of a SolarEdge Nexis Battery Link and 1-4 SolarEdge Nexis Battery Blocks.

(2) Pending compatible firmware release expected in H2 2026.

(3) Wall mounting requires an additional mounting bracket (sold separately) and is subject to local regulations.

(4) When installed in direct sunlight, the Maximum Ambient Operating Temperature is 45°C.

(5) Refer to the official SolarEdge transportation and storage guidelines.

SolarEdge Nexis Battery

For Europe

		Units
STANDARD COMPLIANCE		
Cell	UL 1642; IEC 62619; UN38.3	
SolarEdge Nexis Battery	UL 1973; UL 9540; UN38.3; IEC 62619; UL 9540A; IEC 62109-1; IEC 62477-1	
Emissions	FCC Part 15 Class B	
Insulation	Class I	
Warranty ⁽⁶⁾	10 years	
Expected Service Life ⁽⁷⁾	15 years	

(6) According to the SolarEdge Nexis Battery limited warranty, available on www.solaredge.com.

(7) Based on the nominal use case of one cycle/day at 0.25 C charging and 0.1 C discharging in German climate conditions.

Ordering Information

Product	Model Name	P/N
SolarEdge Nexis Battery Link	NX-LNK	NX-LNK-4B-A-01
SolarEdge Nexis Battery Block	NX-BLCK-5K	NX-BLCK-5K-A-01, UNX-BLCK-5K-A-01
SolarEdge Nexis Battery Block Wall Mount Bracket		IAC-NX-BLCKWMB-01